


BRILLED LIGHTING

LED AREA LIGHT

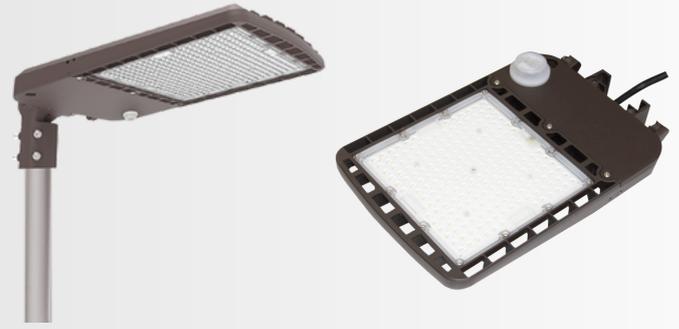

Model	BR-AL-SL0820-200W	BR-AL-SL0830-300W
DLC PRODUCT ID	S-VTHPA8	S-WKSA9I
Wattage (W)	100-150-200 select	200-240-300 select
CCT (K)	3000-4000-5000 select	
Voltage	120-277VAC 50/60Hz	
Efficacy	130lm/W	
Average Lumen Output (lm)	100W (13000lm) 150W (19500lm) 200W (26000lm)	200W (26000lm) 240W (31200lm) 300W (39000lm)
CRI	80	
THD	<20%	
Distribution	Type III-M	
PF	≥.9	
Surge Protector	6kV (Included)	
Sensors	3-pin sensor base (Pre-installed)	
Lamp Bead Model	LUMILEDS	
Driver	Sosen Driver + Bridgelux LEDs	
Waterproof Rating	WET LOCATION (IP65)	
Operating Temperature	-40°C to 45°C	
Safety	UL, FCC, DLC5.1 Premium	
Warranty	5 years	

Lighting Parameters

Part No.	Input Voltage	Frequency	Power	Rated Current
BR-AL-SL0810-100W-H3-TCP	AC100-277V	50/60Hz	100W	1.1A
BR-AL-SL0815-150W-H3-TCP			150W	1.65A
BR-AL-SL0820-200W-H3-TCP			200W	2.2A
BR-AL-SL0824-240W-H3-TCP			240W	2.64A
BR-AL-SL0830-300W-H3-TCP			300W	3.3A

Ordering Information

Example: BR-AL-SL0820-200W-3CCT-3P

Company	Design	Performance (W)	CCT	Sensor Base
BR	AL-SLO8	200W- (100-150-120 select)	3CCT (30/40/50K Select)	3P (3-Pin Base)
		300W (200-240-300 select)		

Options

Options				
Mounting	BR-AL-Mount-TYPE D	LED Area Light Trunnion Mount	TYPE D (Trunnion)	
	BR-AL-Mount-TYPE H	LED Area Light Universal Mount for BR-TS-SL0820 area lights	TYPE H	

Packing Spec

Fixture	Outer Box	QTY/CTN
100/200W	20.24"*13.31"*4.72" 514*338*120mm	1 PC
200/300W	24.92"*15.28"*5.04" 633*388*128mm	1 PC

Extended Function

