


BRILLED LIGHTING

Backlit LED Panel



Model	BR-40S	BR-75S5
Size (ft)	1x4/2x2	2x4
Wattage (W)	20-30-40 Select	20-30-40-50-75 Select
CCT (K)	35-40-50 Select	30-35-40-50-57-65 Select
Efficacy	125lm/w	
Average Lumen Output (lm)	20W(2500) 30W(3750) 40W(5000) 50W(6250) 75W(9375)	
Operating Temperature	-20°C to 50°C	-20°C to 45°C
Voltage	120-277VAC 50/60Hz	
Dimming	0-10V Dimming	
PF	≥.9	
CRI	80	
THD	<20%	
Emergency	8W DC (Option)	
Sensor	BR-US002 (Option 2*4 only)	
Safety	ETL	
DLC	Premium	
Warranty	5 years	

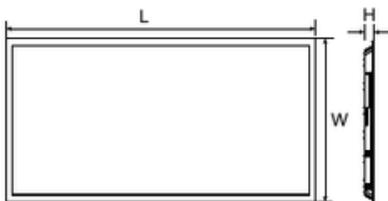

	L x W x H
1x4FT	1214 x 304 x 34mm / 47.80" x 11.97" x 1.34"
2x2FT	604 x 604 x 33mm / 23.78" x 23.78" x 1.30"
2x4FT	1214 x 604 x 33mm / 47.81" x 23.78" x 1.30"

Ordering Information

Example: BR-BPANEL-40S-14-SR

Company	Design	Performance (W)	Size	Sensor
BR (Brilled Lighting)	BPANEL (Back-lit LED Panel)	40S (20-30-40 select) 75S5 (20-30-40-50-75 select)	14 (1x4) 22 (2x2) 24 (2x4)	SR (Sensor Ready) Blank (No sensor)

Options	
Mounting	Grid Mount/Surface Mount
Emergency	DC Emergency, 8W
Control	BR-US002

Packing Spec

Option 1	Inner Box	QTY/BOX	Outer Carton	QTY/CTN	Container QTY (20GP / 40HQ / 53HQ)
1x4ft	1221 x 76 x 311mm / 48.07" x 2.99" x 12.24"	2 PCS	1240 x 245 x 335mm / 48.82" x 9.65" x 13.19"	6 PCS	1674pcs / 3535pcs / 4812pcs
2x2ft	611 x 73 x 617mm / 24.06" x 2.87" x 24.29"		625 x 245 x 635mm / 24.61" x 9.65" x 25"		1680pcs / 3540pcs / 2382pcs
2x4ft	1221 x 73 x 611mm / 48.07" x 2.87" x 24.06"		1240 x 45 x 635mm / 48.82" x 9.65" x 25"		804pcs / 1764pcs / 2382pcs
Option 2	Outer Carton		QTY/CTN	Container QTY (20GP / 40HQ / 53HQ)	
1x4ft	1240 x 225 x 335mm / 48.82" x 8.86" x 13.82"		6 PCS	1872pcs / 3780pcs / 5014pcs	
2x2ft	625 x 225 x 635mm / 24.61" x 8.86" x 25"			1794pcs / 3738pcs / 4950pcs	
2x4ft	1240 x 225 x 635mm / 48.82" x 8.86" x 25"			894pcs / 1878pcs / 2484pcs	