

WATTAGE  
SELECTABLE

3 CCT  
SELECTABLE

5 Year  
Warranty

QUICK CONNECT  
SENSOR READY

**BRILLED**  
**LIGHTING**  
Experts In Highbay Lighting

Product Specification

# Mini Linear High Bay



Stick it to the Man and Fight for the Little Guy!

Tel: (435) 932-0867 Email: [Sales@BrilledLighting.com](mailto:Sales@BrilledLighting.com) Web: [www.brilledlighting.com](http://www.brilledlighting.com)


# Product Description

- ☑ Material: Metal
- ☑ AC120-277V
- ☑ Lumen output: 135-150 LPW
- ☑ 0-10V dimming, 12V DC AUX
- ☑ Operating temperature: -20°C to 50°C
- ☑ PF>0.9, THD<20 %, CRI> 80
- ☑ Beam angle:90°
- ☑ Surge Protection: L-N:6KV, L/N-PE:6KV
- ☑ Basic and Advanced Sensors Available
- ☑ DLC system ID: MIFEGD



## Dimensions

1.2FT

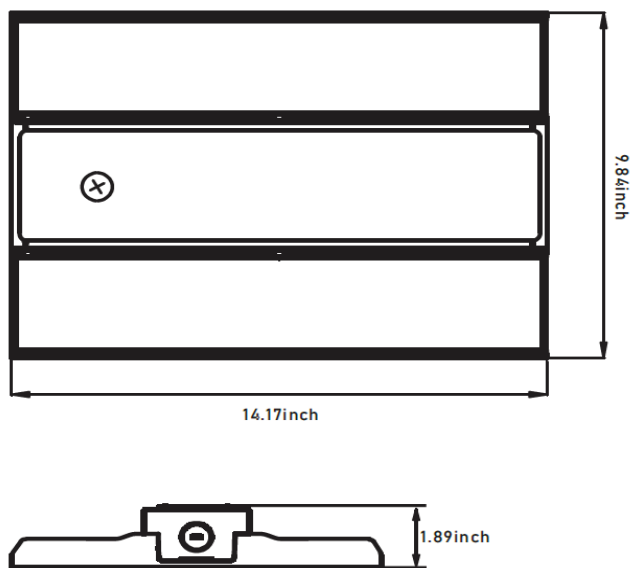

**Quick Ship: FLS04-110/130/160U3550L-01CDMJJA**

Basic Series	Watts		CCT	Input Voltage	Product size	Function	Versions	Lens Type
FLS04	DDD	U	FF	G	HH	III	JJ	X
	070-090-110W 110-130-160W 150-180-220W 180-210-260W 240-270-300W 300-360-400W	U	3500K 4000K 5000K 5700K	L=120-277V H=277-480V	01=360mm 1S=500mm 02=720mm 3M=800mm	CDM=Dimming CDS=Dimming+Sensor Function CDE=Dimming+Emergency CSE=Dimming+Sensor+ Emergency	Blank	Lens "A"

**Stick it to the Man and Fight for the Little Guy!**

Tel: (435) 932-0867 Email: [Sales@BrilledLighting.com](mailto:Sales@BrilledLighting.com) Web: [www.brilledlighting.com](http://www.brilledlighting.com)

# Performance

FLS04-DDDUFFG-HHIIJJJA		3500K		4000K		5000K	
Wattage	Size	Lumen output	LPW	Lumen output	LPW	Lumen output	LPW
70	14.17*9.84*1.89	9400	135	10100	145	9800	140
90		12100		13000		12600	
110		14800		15900		15400	
110	14.17*9.84*1.89	14800	135	15900	145	15400	140
130		17500		18800		18200	
160		21600		23200		22400	
150	19.69*11.81*2.13	21000	140	22500	150	21700	145
180		25200		27000		26100	
220		30800		33000		31900	
180	19.69*11.81*2.13	24000	135	26100	145	25200	140
210		28300		30400		29400	
260		35100		37700		36400	
240	28.35*9.84*1.89	33600	140	36000	150	34800	145
270		37800		40500		39100	
300		42000		45000		43500	
300	31.5*11.81*2.13	42000	140	45000	150	43500	145
360		50400		54000		52200	
400		56000		60000		58000	

## Power & CCT Tunable Series



### Power Tunable

- 70W 90W 110W
- 110W 130W 160W
- 150W 180W 220W
- 180W 210W 260W
- 240W 270W 300W
- 300W 360W 400W

### CCT Tunable

- 3500K 4000K 5000K

Stick it to the Man and Fight for the Little Guy!

Tel: (435) 932-0867 Email: [Sales@BrilledLighting.com](mailto:Sales@BrilledLighting.com) Web: [www.brilledlighting.com](http://www.brilledlighting.com)